

X Non-contact thermometry best done
with *INFRATHERM* pyrometers



IS 5 · IGA 5

Highly accurate, fully digital, very fast

Stationary, digital pyrometers for non contact
temperature measurement between 250°C and 3000°C

- ◆ Temperature ranges between 250 and 3000°C
- ◆ Very small spot sizes, min. 0.5 mm
- ◆ Sighting: laser targeting light, thru-lens view finder or video module
- ◆ Analog output adjustable
0 ... 20 mA or 4 ... 20 mA
- ◆ Built-in maximum value storage
- ◆ Digital interface
- ◆ Bus capable with RS485 interface
- ◆ Small dimensions



The pyrometers **IS 5** and **IGA 5** are digital, compact and fast infrared measuring instruments for non-contact temperature measurement on metals, ceramics or graphite.

For optimal match of the instrument to the application 2 different optics with extremely small spot sizes are available.

The response time of only 2 ms facilitates the measurement of fast heating processes or short temperature peaks.

For a precise alignment of the pyrometers to the measuring object, the instruments are optionally equipped with a laser targeting light, a view finder or a video module.

The most important parameters as emissivity, exposure time and analog output can be set directly in the instrument.

Additionally the pyrometer can be connected to a PC via serial interface, enabling adjustments of further parameters with the delivered software *InfraWin*. This can be used

for temperature indication, data logging and further analyzing of complete temperature processes.

Typical applications:

- Induction heating
- Casting
- Annealing
- Welding
- Forging
- Sintering
- Melting
- Rolling
- Hardening


Technical data

	IS 5	IGA 5
Temperature range:	600 ... 2000°C (MB 20) 800 ... 2500°C (MB 25) 1000 ... 3000°C (MB 30)	350 ... 1800°C (MB 18) 250 ... 2000°C (MB 20) 400 ... 2500°C (MB 25) 500 ... 3000°C (MB 30)
Sub range:	User adjustable (minimum span is 51°C)	
IR detector:	Silicon photo diode (Si)	Indium-Gallium-Arsenic photo diode (InGaAs)
Spektralbereich:	0.8 ... 1.1 µm	1.45 ... 1.8 µm
Power supply:	24 V DC ± 25%, stabilized, ripple must be less than 50 mV	
Power consumption:	≤ 3 W (incl. active laser targeting light)	
Analog output:	0 ... 20 mA or 4 ... 20 mA, switchable, linear in temperature, load independent DC	
Interface:	Optional RS232 or RS485 (addressable), half duplex, baud rate 1.2 up to 38.4 kBD	
Resolution:	0.1°C at the interface at the analog output < 0.1% of the adjusted temperature range but min. 0.1°C	
Isolation:	Power supply and digital output and analog output are galvanically isolated against each other	
Parameters:	Adjustable on the converter's rear side: emissivity, response time, analog output 0 ... 20 mA or 4 ... 20 mA, online / offline mode for settings via PC or pyrometer. Additionally via interface adjustable and readable: temperature sub range, settings for maximum value storage, address, baud rate. Via interface readable only: measured value, internal temperature of the unit Pyrometers with PID-controller via software adjustable: set point, proportional band, rate time / integral time, output delimitation.	
Maximum value storage:	Single or double storage, clear modes: time (off; 0.01 s; 0.05 s; 0.25 s; 1 s; 5 s; 25 s), external clear contact, via interface or automatic „hot object mode“, hold-function for freezing the current temperature reading (not at pyrometers with PID-controller)	
Emissivity ε:	0.2 ... 1 adjustable in the instrument or with the software <i>InfraWin</i> in steps of 0.01	
Response time t ₉₀ :	≤ 2 ms, adjustable to 0.01 s; 0.05 s; 0.25 s; 1 s; 3 s; 10 s	
Measurement uncertainty: (T _{amb.} = 25°C, ε = 1, t ₉₀ = 1 s)	< 350°C: 0.5% of reading in °C + 1°C 350 ... 1500°C: 0.3% of reading in °C + 1°C > 1500°C: 0.5% of reading in °C + 1°C	
Repeatability:	0.2% of reading in °C + 1°C (T _{amb.} = 25°C, ε = 1, t ₉₀ = 1 s)	
Noise equivalent temperature difference (NETD):	0.4°C (t ₉₀ = min=2 ms); 0.1°C (t ₉₀ = 0.01 s) (ε = 1, T _{amb.} = 10 ... 40°C)	
Sighting system:	Laser targeting light (laser class 2, max. power < 1 mW, λ = 630 - 660 nm) or thru-lens view finder or video module	
Protection class:	IP65 (DIN 40050)	
Ambient temperature:	0 ... 70°C	
Storage temperature:	-20 ... 70°C	
Weight:	550 g	
Housing:	Stainless steel, dimension see drawing on the right side	
CE-label:	According to EU directives about electromagnetic immunity	

Additional technical data for pyrometers with built-in video module:

Video signal:	CCIR norm approx. 1 V _{pp} at 75 Ω, 50 Hz (special option: EIA norm 60 Hz, NTSC-M compatible)
Array size:	CCIR norm: 628 x 583 pixels, black & white (EIA norm: 510 x 492 pixels, black & white)
Exposure:	Automatic, additionally 3-levels controlled by the measuring temperature
Field of view:	Approx. 10% x 14% of focused distance
Date/time:	Real-time clock with at least 3 days spare run
Video output plug:	Separate round plug at the pyrometer, not galvanically separated to the pyrometers power supply
Picture insertions:	Target marking; unit number or user text (max. 12 characters), time and/or date; (individually switchable), measuring temperature, emissivity


Sighting

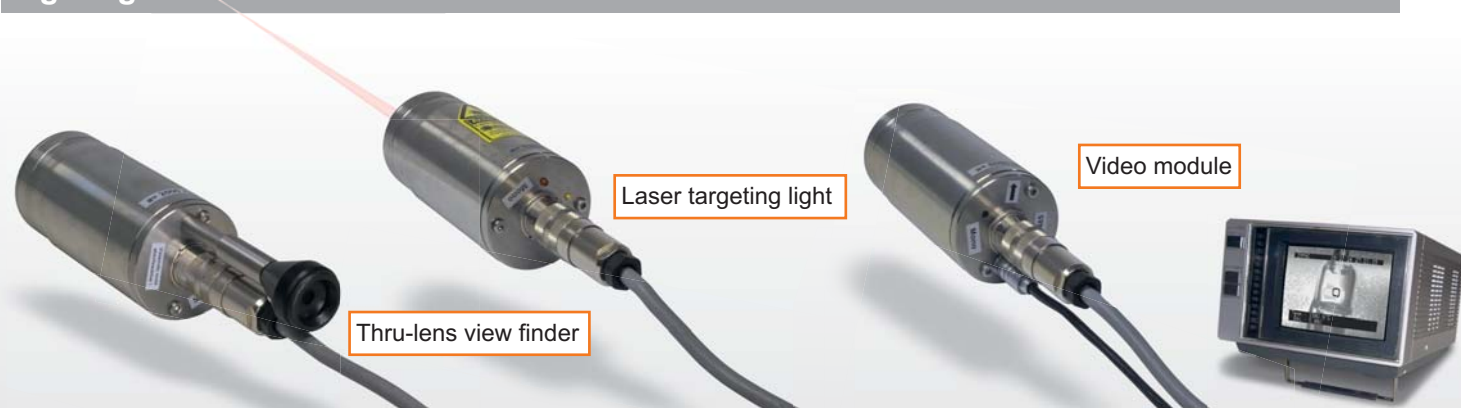

Optics

Two different optics are available. The optics are adjusted ex works to one of the distances “a” mentioned in the table below, to achieve the smallest possible spot size in the corresponding measuring distance (measured from the front of the housing). The required measuring distance has to be specified when ordering, other distances within the optics range are possible on request.

Optics F for long distances 220 ... ∞	Temperature range			
	IS 5		IGA 5	
	MB 20	MB 25 MB 30	MB 20	MB 18 MB 25 MB 30
Meas. distance a [mm]	Spot size M_{90} [mm]			
220 mm	2	1	2	1
300 mm	2.7	1.4	2.7	1.4
500 mm	4.8	2.4	4.8	2.4
800 mm	8	4	8	4
1300 mm	13	6.6	13	6.6
2000 mm	22	12	22	12
4000 mm	50	28	50	28
Aperture D [mm]	5	5 (MB 25) 3 (MB 30)	8	8 (MB 18, 25) 5 (MB 30)

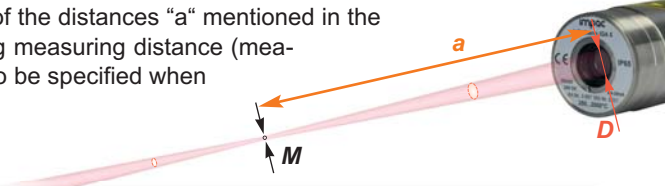


Optics N for short distances 90 ... 250 mm	Temperature range			
	IS 5		IGA 5	
	MB 20	MB 25 MB 30	MB 20	MB 18 MB 25 MB 30
Meas. distance a [mm]	Spot size M_{90} [mm]			
90 mm	1	0.5	1.1	0.7
100 mm	1.1	0.6	1.3	0.8
150 mm	1.8	0.9	2	1.1
200 mm	2.6	1.4	2.6	1.4
250 mm	3.1	1.6	3.6	1.8
Aperture D [mm]	5	5 (MB 25) 3 (MB 30)	8	8 (MB 18, 25) 5 (MB 30)



IS 5-C and IGA 5-C: Special versions with integrated PID-controller

The **IS 5-C** and **IGA 5-C** are equipped with an integrated PID controller. This enables automatic controlling and monitoring of processes. The controller compares the current measuring temperature with the target temperature value, calculates the control signal and gives a controller output signal of 0 or 4 ... 20 mA (instead of the temperature signal output). The controller is very fast and updates the signal with the pyrometer's response time (≤ 2 ms). The built-in self-tuning algorithm determines automatically and a very good approximation of the controlling parameters P, I and D.

Activating and deactivating of the controller as well as setting the parameters can be done via interface and software or via portable parametrizing device HT 6000 or the LED digital display DA 6000 or DA 6000-N.

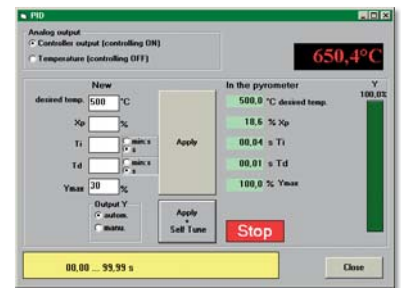


Dimensions

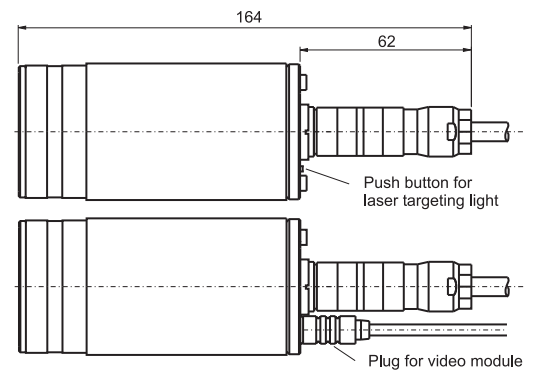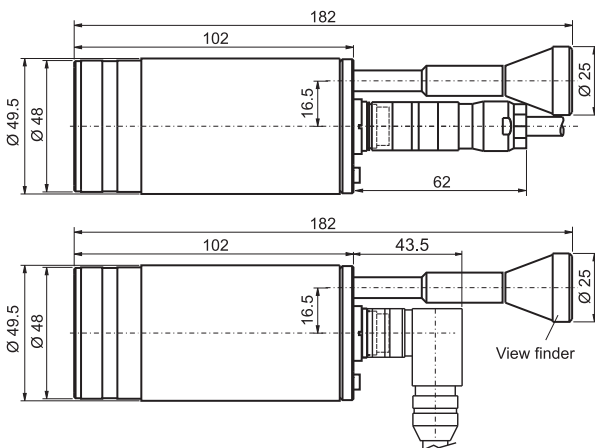

All dimensions in mm

Instrument settings in offline mode

The most important parameters as emissivity, exposure time and analog output can be set directly in the instrument. After removing the cover on the back side of the pyrometer, the corresponding adjustments are accessible.

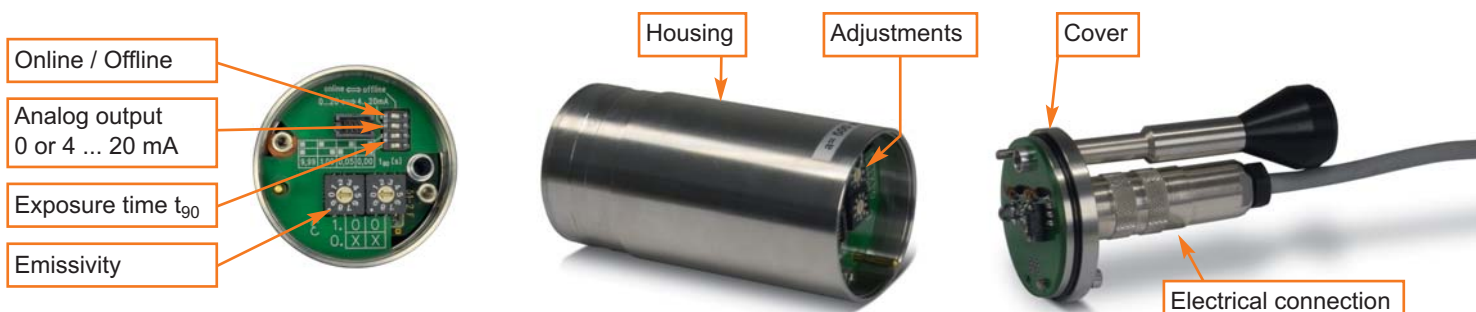

Reference numbers

Type	Temperature range	With laser targeting light		With thru-lens view finder		With video module *)	
		Interface		Interface		Interface	
		RS232	RS485	RS232	RS485	RS232	RS485
IS 5	MB 20: 600 ... 2000°C	3 857 150	3 857 160	3 857 170	3 857 180	3 847 150	3 847 160
	MB 25: 800 ... 2500°C	3 857 200	3 857 210	3 857 220	3 857 230	3 847 200	3 847 210
	MB 30: 1000 ... 3000°C	3 857 250	3 857 260	3 857 270	3 857 280	3 847 250	3 847 260
IS 5-C	MB 20: 600 ... 2000°C	3 851 150	3 851 160	3 851 170	3 851 180	-	-
	MB 25: 800 ... 2500°C	3 851 200	3 851 210	3 851 220	3 851 230	-	-
	MB 30: 1000 ... 3000°C	3 851 250	3 851 260	3 851 270	3 851 280	-	-
IGA 5	MB 18: 350 ... 1800°C	3 857 400	3 857 410	3 857 420	3 857 430	3 847 400	3 847 410
	MB 20: 250 ... 2000°C	3 857 350	3 857 360	3 857 370	3 857 380	3 847 350	3 847 360
	MB 25: 400... 2500°C	3 857 450	3 857 460	3 857 470	3 857 480	3 847 450	3 847 460
	MB 30: 500 ... 3000°C	3 857 920	3 857 930	3 857 940	3 857 950	3 847 920	3 847 930
IGA 5-C	MB 18: 350 ... 1800°C	3 851 400	3 851 410	3 851 420	3 851 430	-	-
	MB 20: 250 ... 2000°C	3 851 350	3 851 360	3 851 370	3 851 380	-	-
	MB 25: 400... 2500°C	3 851 450	3 851 460	3 851 470	3 851 480	-	-
	MB 30: 500 ... 3000°C	3 851 920	3 851 930	3 851 940	3 851 950	-	-

*) Standard in CCIR norm. Video module with EIA norm please order separately.

Scope of delivery: Converter, works certificate, PC operating and analyzing software *InfraWin*.

Ordering details: - When ordering please select optics N or F as well as the required measuring distance.
- A connection cable or video cable is not included in scope of delivery, it has to be ordered separately.



Accessories:

3 820 330	connection cable, 5 m, straight connector	3 837 230	Water cooling jacket (heavy design) with integrated air purge unit
3 820 500	connection cable, 10 m, straight connector		
3 820 510	connection cable, 15 m, straight connector	3 837 370	Water cooling jacket (lightweight design, only pyrometers with laser targeting light) with integrated air purge unit
3 820 810	connection cable, 20 m, straight connector		
3 820 820	connection cable, 25 m, straight connector	3 846 590	Vacuum flange KF16 with quartz glass window
3 820 520	connection cable, 30 m, straight connector	3 852 540	Power supply NG 0D for DIN rail mounting (85 ... 265 V AC ⇒ 24 V DC, 600 mA)
3 820 740	connection cable, 5 m, straight connector, temperature resistant up to 200°C	3 852 550	Power supply NG 2D, as NG 0D with 2 limit switches
3 821 050	connection cable, 5 m, 90° connector	3 890 640	DA 4000-N: LED digital display (switchboard assembling)
3 821 060	connection cable, 10 m, 90° connector	3 890 650	DA 4000: as DA 4000-N, additionally with 2 limit switches
3 821 330	connection cable, 12 m, 90° connector	3 890 560	DA 6000-N: LED digital display with digital input RS232 and possibility for setting pyrometer parameters
3 821 280	connection cable, 20 m, 90° connector		
3 820 430	Video cable with Cinch-/SCART plug 5 m (other length up to 30 m available)	3 890 570	DA 6000-N with RS485
		3 890 520	DA 6000: LED digital display, digital- and analog input, 2 limit switches, maximum value storage, analog output, RS232
3 821 220	Video cable with BNC plug 5 m (other length up to 20 m available)		
3 834 210	Adjustable mounting support	3 890 530	DA 6000 with RS485
3 835 160	Air purge unit, aluminium	3 826 500	HT 6000: portable battery driven indicator and instrument for pyrometer parameter settings; RS232 / RS485
3 835 440	Air purge unit, stainless steel	3 826 510	PI 6000: programmable PID controller

Overview accessories



IMPAC Infrared GmbH
Temperature Measurement

Contika Aps
Hindhøj 82
8382 Hinnerup
Tel: 8624 5066

Specifications are subject to change without notice