


# Laser Distance Sensors D-Series

## Type DBN-50-050

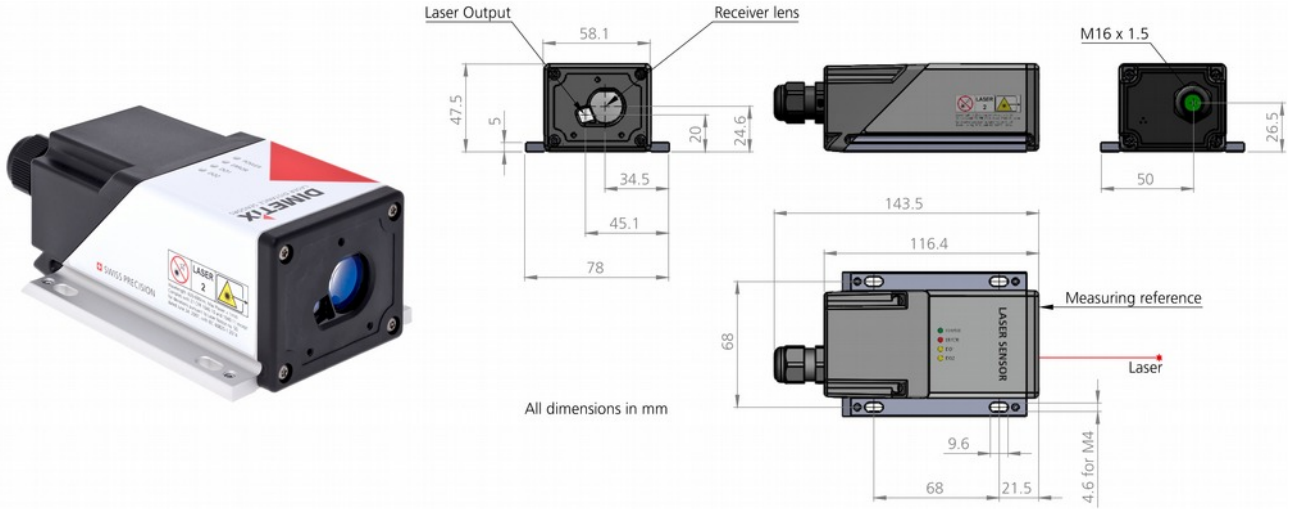

Part No. 500635

### SPECIFICATION

Typical accuracy @ $\pm 2\sigma$ (@ $\pm 1\sigma$ )	$\pm 5$ ( $\pm 2.5$ ) mm
Typical repeatability @ $\pm 2\sigma$ (@ $\pm 1\sigma$ )	$\pm 1.8$ ( $\pm 0.9$ ) mm
Measuring range on natural surfaces	0.05...~50 m
Measuring range on reflective foil	
Max. measuring rate	10 Hz Max.
output rate	10 Hz
Operating temperature	-10...+50°C
Degree of protection	IP65
Power supply	12...30 VDC (0.15A @ 24 VDC)
Laser red, visible (Laser Class 2, <1mW)	✓
Typical diameter of laser dot @ 10, 50	7 x 3 mm ; 28 x 13 mm
Dimension (L x W x H)	140 x 78 x 48 mm
Weight	350 g

### INTERFACES

Analog output, programmable	0/4...20 mA
Max. error analog output	$\pm 0.2$ %
Digital input, programmable	1
Digital output, programmable / error display (Type: NPN, PNP, Push-Pull)	2 / 1
Serial Interfaces RS-232	✓
USB, only for configuration	✓
Optional: PROHBUS (external) / PROHNET / EtherNet/IP / EtherCAT	

### CONNECTION

Internal screw terminals	✓
--------------------------	---

Subject to change without notice. Further our General Terms and Conditions of Sale and Supply ("GTC") are valid.

